

My RollTarp Pairing and Setup Instructions

STEP 1




From the Apple App Store or Google Play Store, Search and Download the *My RollTarp* Application.

STEP

You can Pair your Control Box two ways:

Scanning the QR Code or Entering the 4-digit Code. (Both located on the inside panel of the control box.)

Make sure your Control Box is Powered On.



STEP 2



Locate and Open your Control Box. On the inside panel, locate the QR Code. You'll need this during Bluetooth Pairing.



STEP 3




STEP 5

Once your Phone and Control
Box are paired, you should
see this screen.

Select Single Touch (Tarp System Only)
or Multi-Touch
(Tarp System AND Trap System)
Click Next.

You will be asked if you would
like to setup a password to

this device.



Continue to Page 2



My RollTarp Pairing and Setup Instructions

STEP 6


Enter your Device Name (i.e. My Grain Trailer)

Click Submit.

Note: You can edit your Device's Name at anytime.



HOME SCREEN

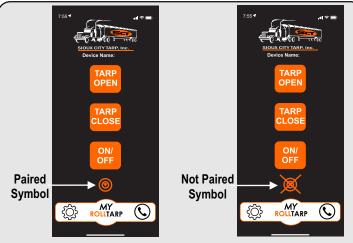

Note: Your Control Box needs to be Powered On for your App to be paired. BlueTooth range is approximately 50-100ft. Large buildings / structures between will interfere with the signal.

STEP 7

Once you get through successfully pairing and naming your Device, you will see this screen.

Your Smartphone and Control Box are now paired.

To turn on, make sure you hold down the On/Off Button for 3-5 seconds.
You will hear your motor jump.

SUCURITY TARP, Inc.

Success!

Your device has been added.

OTHER SCREENS



Tip: Much like a Bluetooth Speaker, only one phone can control the Tarp System at a time. You will need to pair and unpair from person to person.

Once the Control Box is initially setup on a user's phone, re-pairing only takes seconds.